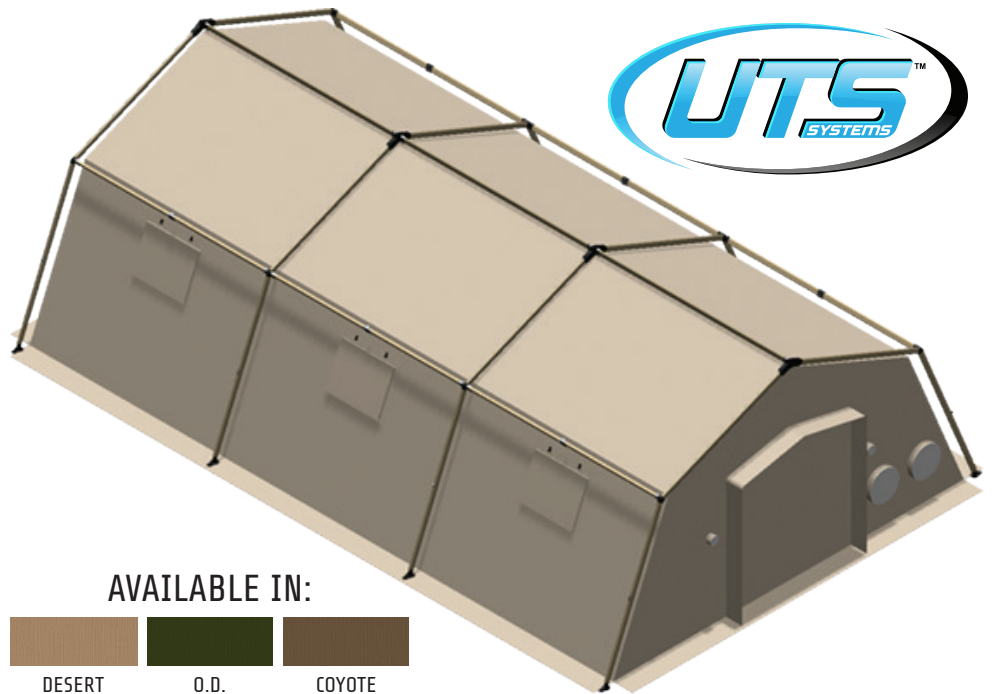


SHELTERS

The latest technology and design in rapid deploying shelters currently fielded with US military forces. UTS expeditionary military shelters benefit from an innovative system of deployment. The rapidly-deployable soft shelter incorporates a unique external folding-frame design and an internal liner system integrated with the outer fabric. The ease and speed with which our shelter systems deploy saves time and simplifies training. The innovative frame design and rope-and-pulley system provides a simple and easy to remember set-up procedure. Shelter setup times range from 5–50 minutes for all shelters.



AVAILABLE IN:



*Shelter shown without thermal fly.

USED FOR



MEDICAL FACILITIES



BASECAMPS & BILLETING



CBRN DEFENSE



DECON



COMMAND & CONTROL

TESTED FOR



WIND



SNOW LOAD



DRIVING RAIN



BLACKOUT



ERECT & STRIKE

FEATURES & BENEFITS

- **EASE OF DEPLOYMENT:** All of the shelter models are rapid-deploying with average setup times between 5-50 minutes with minimal people and no tools or ladders. The setup procedures are simple and intuitive and require a minimal amount of training. This is all made possible because of the unique rope and pulley system. The systems allow the frame to be setup first allowing the fabric to be hoisted into place below the frame, eliminating the requirement to lift both the frame and fabric simultaneously. Having the frame external to the outer fabric allows for a thermal fly to be installed on top of the frame which creates additional environmental protection.
- **DURABILITY:** All aspects of the shelter are designed to be rugged and durable. The frame is built with robust components that are high strength offering trouble free setup. The fabric components are manufactured using the highest quality products with the most modern fabrication techniques.
- **PROVEN:** UTS shelters meet or exceed all DOD standards for environmental performance. Testing has been successfully completed for snow load, wind load, driving rain, blackout, durability, sand, dust, and salt fog.
- **MISSION READINESS:** Each UTS shelter comes equipped with integral ECU ducting, electrical outlets and remain inside the shelter during takedown and pack out. The optional lighting can also be left integral to the shelter during takedown and pack out.
- **MODULAR:** The shelters come in various sizes that can be interconnected to create larger complexes to meet the mission needs.
- **THERMAL EFFICIENCY:** The shelter has a very energy efficient design with a standard liner and thermal fly. Additional thermal efficiency can be achieved using the optional insulated liners.
- **SUPPORT:**
 - On sight delivery + free training
 - Refresher training
 - 24/7 Support in the field

©2023 UTS Systems, LLC

Current as of July 2022. Information subject to change without notice.












UTS Systems, LLC | 6051 North Lee Hwy, Fairfield, VA 24435

850.226.4301 | sales@uts-systems.com

uts-systems.com

111423

UTS SHELTER SPECIFICATIONS

	TYPE	DIMENSIONS	SQUARE FOOTAGE	TOTAL WEIGHT	SETUP TIME	CREW SIZE	NSN ORDERING INFORMATION
	TM18	19'x10'	190'	429 lbs	3-5 min.	2 person	2DR DT: 8340-01-583-4250 2DR OD: 8340-01-579-1400 4DR DT: 8340-01-691-9525 4DR OD: 8340-01-691-9978
	TM36	19'x20.4'	388'	630 lbs	5-7 min.	3-4 person	2DR DT: 8340-01-583-4010 2DR OD: 8340-01-579-1548 4DR DT: 8340-01-691-9539 4DR OD: 8340-01-689-6003 6DR DT: 8340-01-691-9602 6DR OD: 8340-01-691-9997
	TM54	19'x29'	551'	788 lbs	5-15 min.	4-5 person	2DR DT: 8340-01-583-0544 2DR OD: 8340-01-579-1568 6DR DT: 8340-01-691-9760 6DR OD: 8340-01-689-5971
	TM54 TALL	21'x29'	600'	859 lbs	5-15 min.	4-5 person	6DR DT: 8340-01-693-8770 6DR OD: 8340-01-693-8780
	TM60	19'x34'	650'	969 lbs	10-15 min.	5-6 person	2DR DT: 8340-01-583-0545 2DR OD: 8340-01-579-1528 4DR DT: 8340-01-693-8884 4DR OD: 8340-01-689-5989 6DR DT: 8340-01-691-9617 6DR OD: 8340-01-689-5973
	TM60 TALL	21'x34'	720'	1,053 lbs	10-15 min.	5-7 person	6DR DT: 8340-01-691-9823 6DR OD: 8340-01-689-5996
	TM75	19'x42'	800'	1,181 lbs	15-20 min.	6-7 person	
	TM75 TALL	21'x42'	882'	1,254 lbs	15-20 min.	6-8 person	6DR DT: 8340-01-691-9833 6DR OD: 8340-01-692-0013
	TXL40	29'x16.5'	460'	974 lbs	20 min.	5 person	6DR DT: 8340-01-691-9927 6DR OD: 8340-01-692-0023
	TXL80	29'x33'	808'	1,923 lbs	30 min.	8-10 person	6DR DT: 8340-01-691-9841 6DR OD: 8340-01-692-0043
	TXL120	29'x49.5'	1,210'	2,872 lbs	40-50 min.	12-15 person	6DR DT: 8340-01-691-9917 6DR OD: 8340-01-689-5983